


MP Mini-Photohelic Differential Pressure Switch/Gage

Compact, Low Cost Switch Gage

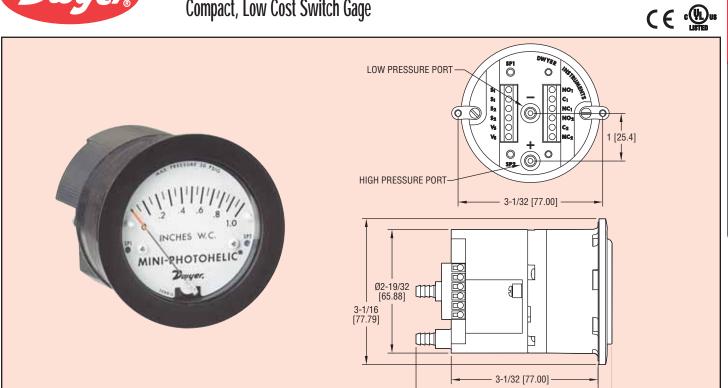

The Series MP Mini-Photohelic® differential pressure switch/gage combines the time proven Minihelic® II differential pressure gage with two SPDT switching setpoints. The Mini-Photohelic® gage is designed to measure and control positive, negative, or differential pressures consisting of non-combustible and non-corrosive gases. Gage reading is independent of switch operation. Switching status is visible by LED indicators located on the front and rear of the gage. Set points are adjusted with push buttons on back of unit. This extremely compact switch/gage is ideal for fume hoods, dust collection, pneumatic conveying and clean room applications.

	Range, Inches of		Range, MM of
Model	Water	Model	Water
MP-000	0-0.5	MP-25MM	0-25
MP-001	0-1.0	MP-50MM	0-50
MP-002	0-2.0	MP-100MM	0-100
MP-003	0-3.0		
MP-005	0-5.0	Model	Range, Pa
MP-010	0-10	MP-125PA	0-125
MP-020	0-20	MP-250PA	0-250
MP-040	0-40	MP-500PA	0-500
MP-060	0-60		
MP-100	0-100		
Model	Range, PSI	Model	Range, kPa
MP-5PSI	0-5	MP-1KPA	0-1
MP-10PSI	0-10	MP-3KPA	0-3
MP-15PSI	0-15		

For optional 1/8" male NPT connections, add suffix -NPT to model numbers listed above.

Example: MP-000-NPT. Allow additional lead time.

SPECIFICATIONS

GAGE SPECIFICATIONS

Service: Air and non-combustible, compatible gases.

3-13/16 [96.84]-

Wetted Materials: Consult factory.

Accuracy: ±5% of full scale @ 70°F (21.1°C). Gage face mounted in

9/32 [7.134]

vertical position.

Pressure Limits: 30 psig (2.067 bar).

Temperature Limits: 20 to 120°F (-6.7 to 49°C).

Process Connections: Barbed for 3/16" I.D. tubing (STD); 1/8" male

NPT (optional).

Size: 4-1/8" (104.78 mm) depth x 3-1/16" (77.79 mm) diameter.

Weight: 23 oz (652 g).

SWITCH SPECIFICATIONS

Switch Type: (2) SPDT relays.

Electrical Rating: 5A @ 120/240 VAC resistive; 5A @ 30 VDC. Electrical Connections: Screw type terminal block. Accepts 22-12

Power Requirements: 24 VDC / 24 VAC 50/60 Hz 4 watts. Mounting Orientation: Gage face in vertical position.

Set Point Adjustment: Push buttons.

Standard Accessories: (2) mounting screws, (1) .050" hex allen

wrench.

Agency Approvals: UL, cUL, CE.