




SMOKE DETECTOR

SL-2000



The SL-2000 series duct smoke detectors will provide early detection of smoke and products of combustion present in the air moving through HVAC ducts in any commercial, industrial, or residential application. These devices are designed for the prevention of smoke re-circulation by the air handling systems, fans, and blowers. The SL-2000 is designed and built to meet all local requirements, as well as the NFPA regulations, regarding duct smoke detectors. Output terminals are provided for remote accessories such as horns, strobes, remote status indicators, and test/reset key switches or pushbuttons. The Ionization and Photoelectric detector heads

are interchangeable and air sampling is accomplished via two tubes that protrude into the duct. An exhaust tube with a standard length of 7" is supplied in the installation kit with the unit. Once the duct size is determined, a sampling tube should be ordered. Four standard sizes including a 1', 2.5', 5', and 10' lengths can be ordered and cut to the correct size of the duct. The SL-2000 provides two sets of 10A form "C" and one set of a 2A form "A" alarm contacts, along with one set of 10A form "C" trouble contacts for monitoring head removal and supply voltage failure.

The ACI remote accessories are designed to be used with the ACI Duct Smoke detectors to provide audible and visual indication as well as remote test/reset functions. These devices mount to a standard single or double gang electrical backbox. Remote accessories are usually required by the AHJ (Inspector) for installation. If a duct smoke detector is not wired to a fire system or a remote test station, when the unit goes into alarm, the end user would have to climb up to the duct to manually reset the unit. ACI offers two series of remote accessories, The MS Series and the MSR-50R Series.

Applications: Smoke Detection in HVAC Ducts in Commercial, Industrial & Residential Applications

The SL-2000 Series is covered by ACI's Two (2) Year Limited Warranty, which is located in the front of ACI's Sensors & Transmitters catalog or can be found on ACI's website, which is: www.workaci.com.


PRODUCT SPECIFICATIONS

Supply Voltage:	24 VAC/VDC, 115 VAC, 230 VAC
Maximum Operating Current (Standby):	24 VDC: 14 mA 24 VAC: 55 mA 115 VAC: 22 mA 230 VAC: 12 mA
Maximum Operating Current (Alarm):	24 VDC: 68 mA 24 VAC: 190 mA 115 VAC: 32 mA 230 VAC: 18 mA
Alarm Relay Contacts:	Resistive Load: 2 sets form "C" rated at 10 Amps @ 115 VAC Resistive Load: 1 set form "A" rated at 2 Amps
Trouble Relay Contacts:	Resistive Load: 1 set form "C" rated at 10 Amps @ 115 VAC
Detection Head Type:	Photoelectric or Ionization: See Ordering Grid on Back of Data Sheet
Air Velocity:	100 to 4,000 ft / minute
Wiring Connections:	Screw Terminal Blocks
Conductor Size:	Solid or Stranded: #12 to #22 AWG
Operating Temperature (SL-2000-N):	32°F to 158°F (0°C to 70°C)
Operating Temperature (SL-2000-P):	32°F to 140°F (0°C to 60°C)
Maximum Operating Humidity Range:	85 ±5 % RH (@32 ±2°C; 86 ±3.6°F) Non-Condensing / Non-Freezing
Enclosure Material:	Grey plastic backbox, clear plastic cover (Makrolon 94V-0)
NEMA Rating:	NEMA 1
Hardware Included:	7" exhaust tube, sampling tube end cap, mounting template, test magnet, & mounting hardware
Enclosure Product Dimensions:	(L) 13.5" (342.9 mm) x (W) 4.5" (114.3 mm) x (H) 2.25" (57.15 mm)
Product Weights:	2.5 lbs (1.13 kg)
Agency Approvals:	UL & CUL Listed (UL268A, UROX, UROX7) File # S2829 CSFM Listed (3240-1004:105) MEA Accepted (73-92-E; VOL. 27)
Radioactive Element:	For SL-2000-N (Ionization) Americium 241; 0.9 Micro-Curie Do not expose to corrosive atmospheres





DIMENSIONAL DRAWING

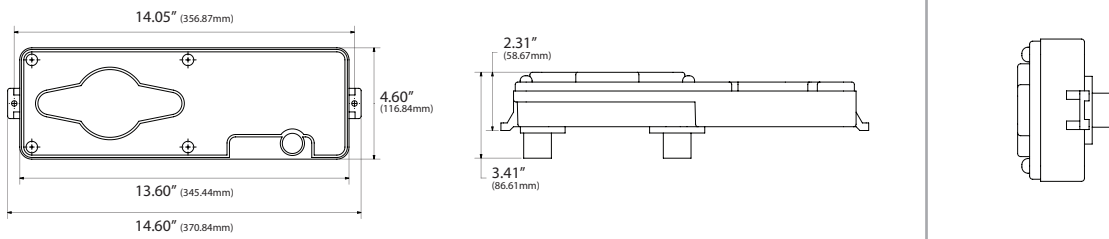

Front & Top Views

Right View

STANDARD ORDERING

Model # Example: **SL-2000-N** -OR- **105791**

Model #	Item #	Smoke Detector Type
SL-2000-N	105791	Ionization
SL-2000-P	105792	Photoelectric

SAMPLING TUBE ORDERING

Model # Example: **FAST TUBE** -OR- **131201**

Model #	Item #	Description
FAST TUBE	131201	Package of (3) 24" Sections Sectional sampling tube, quickly assembled to length & UL
STN-1.0	111653	Sampling Tube for 12" or less duct width
STN-2.5	105793	Sampling Tube for 6" to 2.5' duct width
STN-5.0	105794	Sampling Tube for 2.5' to 5.0' duct width
STN-10.0	105795	Sampling Tube for 5.0' to 10.0' duct width

ACCESSORIES ORDERING

Model # Example: **55000-225APO** -OR- **110913**

Model #	Item #	Description
WP-2000 ENCLOSURE	106505	Weatherproof Enclosure, NEMA type 3R
55000-225APO	110913	Replacement Ionization Detector Head
55000-328APO	131873	Replacement Photoelectric Detector Head
TG-2000	128407	Aerosol Test Gas

Note*: See MS & MSR Series Data Sheets for Remote Wall Plate Accessories (usually required)

