

Accessories

TRM-768: RS-485 LAN Terminator

Description

The Delta Controls TRM-768 provides end-of-line termination on RS-485 networks using balanced cable (100 to 120 Ω nominal impedance).



Application

It is recommended that balanced network cable be installed for all RS-485 networks, including V2 Zone networks, BACnet® MS/TP networks and LINKnet networks. LINKnet networks may not require termination if only 1 or 2 devices exist on the network.

Features

- ▶ Provides proper end-of-line termination for a balanced RS-485 LAN cable and its shield
- ▶ Snap-track mounting
- ▶ Ground loop protection circuitry

Specifications

Wiring Class

Class 2

Ambient

32° to 131°F [0° to 55°C]

10 to 95% RH (non-condensing)

Dimensions

2.4 x 1.3 x 1.4 in. (6 x 3.4 x 3.5 cm)

Weight

0.05 lb (20 g)


Listings

UL 916 Listed

UL 864 Listed for UL 864 product numbers

Accessories

TRM-768: Board Layout Diagram

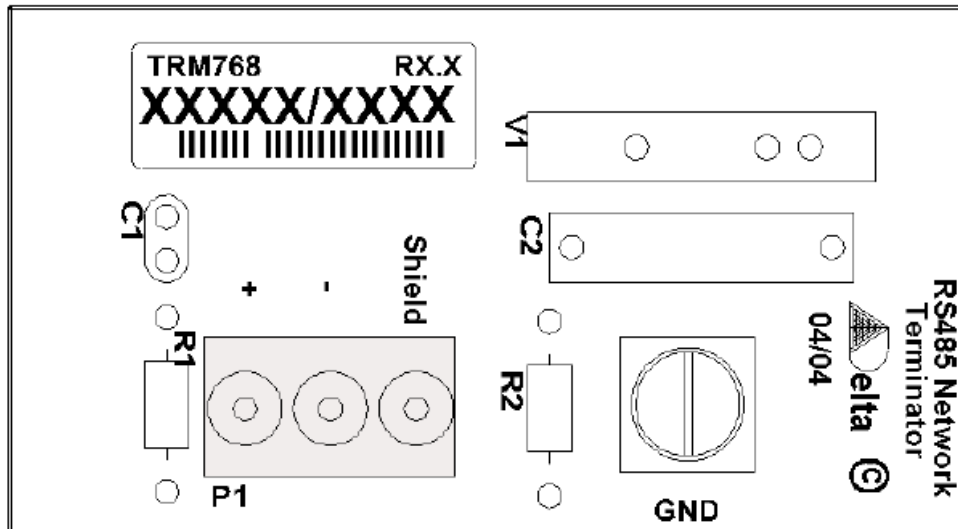

Ordering

Order the TRM-768 LAN Terminator according to the following product numbers:

TRM-768	RS-485 LAN terminator
TRM-768-UL864	RS-485 LAN terminator, UL 864 Listed

Accessories

CON-768BT	Delta Network Bluetooth to MS/TP Converter
CON-768	Delta Network Converter
DZNR-768	4-port Delta Network Repeater for RS-485 BACnet MS/TP*

* UL 864 versions available

BACnet is a registered trademark of the American Society of Heating, Refrigerating and Air Conditioning Engineers Inc.

Updated July 2015

Subject to change without notice.